

Technical Description


Float for Ex-BTL

Edition 0306 (replaces Edition 0202)

BTL2-S-4414-4Z01-Ex

PTB Nr. Ex-96.D.2054

PTB 02 ATEX 1097 X

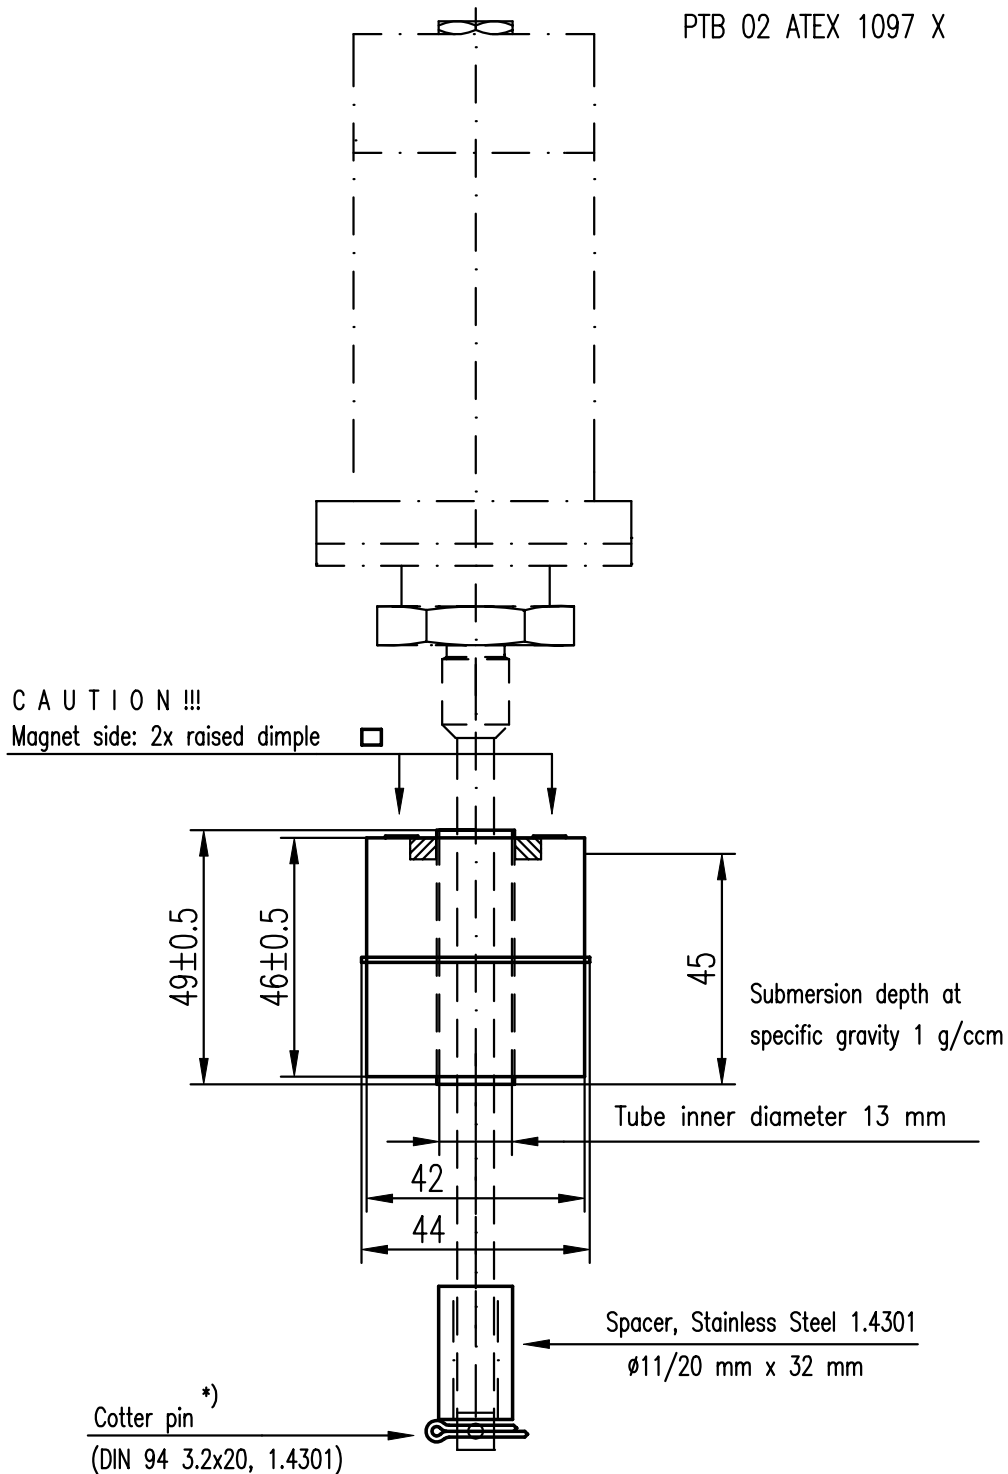

Technical Data

Material	Stainless Steel 1.4404
Operating temperature	-20°C...+120°C
Pressure (static)	max 20 bar
Float TIG- welded	
Dimensions	see above
Weight	52g
Orientation	Dimple (2x) towards top
Specific gravity	0.85g/ccm

*)

When assembling or disassembling the cotter pin, there is no load permitted on the weld bead at the end of the pressure tube. Feed the cotter pin through the hole and use pliers to hold at the eye. Use a second pliers to bend the ends of the pin around the tube. Caution: Cotter pin may be used only once !!

Technical data according to normal conditions

EDr 17. Juni 2003 Modifications reserved Mod.-No.

Balluff GmbH, P.O.-Box 1160, 73761 Neuhausen, Germany
Phone: ++49 7158 1730, Fax: ++49 7158 5010

BALLUFF

GB 4
720 004 -777/page 1/1